


CP Series Power Supply

CP1624-8UL
CP824-4UL
CP424-4UL
CP824-12
CPS1209

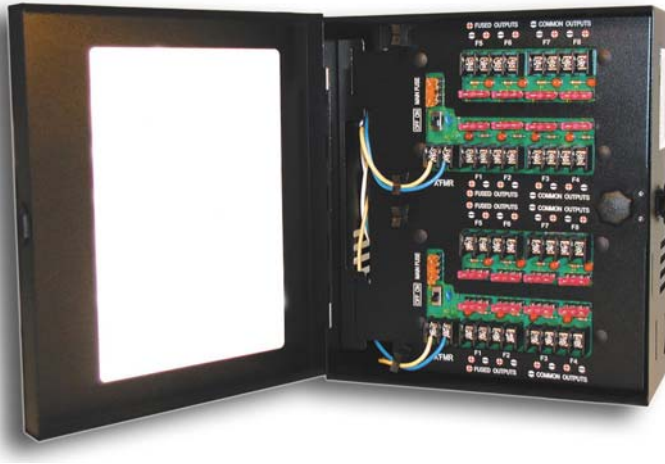

The Costar CP power supplies are designed to manage power requirements of remote cameras and accessories. The CP Series distribution power modules are designed with 4, 8, or 16 channels individually fused outputs in either 12 or 24-volt options. The CP Series power centers are housed in the premium heavy gauge metal enclosure.

- Convenient screw terminal and fuse access
- Separation panel between transformers and output access (UL models)
- Power ON/OFF switch
- AC power LED indicator
- Individual LED's for each fused output
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses (24 VAC models)
- Includes transformer and spare fuses
- Double coated polyurethane finish
- Lockable heavy gauge metal enclosure

CP Series Power Supply Specification

Models

CP424-4UL	(24VAC) 4 individually fused channels, UL Listed , 4 Amp
CP824-4UL	(24VAC) 8 individually fused channels, UL Listed , 4 Amp
CP1624-8UL	(24VAC) 16 individually fused channels, UL Listed , 8 Amp
CP824-12	(24VAC) Extreme IR, 8 individually smart fused channels, 12.5 Amp
CPS1209	(12VDC) 9 individually fused channels, 7 Amp.

24 VAC Inputs / Outputs

Input Voltage	115 VAC 50/60 HZ:
Output Voltage	24V AC
Fuse Rating	3 Amps (5 Amps CP824-12)
Main Fuse Rating	5 Amps(15 Amps CP824-12)

Mechanical

Enclosure dimensions	10" (H) x 9" (W) x 4.5" (D)
Approvals	UL* (see models above)

12 VDC Inputs / Outputs

Input Voltage	115 VAC
Output Voltage	12 VDC, 7A
Fuse Rating	3.15 Amps
Main Fuse Rating	4 Amp

Mechanical

Enclosure dimensions	10" (H) x 8.25 (W) x 3.5" (D)
----------------------	-------------------------------

Models



Model: CP424-4UL (4 Amp)



Model CP824-4UL (4 Amp)



Model CP1624-8UL (8 Amp)



Model CP824-12 (12.5 Amp)



CPS1209 (7Amp)

Design and specifications subject to change with out notice. Conversions: 1" = 25.4mm Measurement conversions are approximate.