

### 2 Megapixel Network Height Strip Camera



Height Strip Camera



Conventional Camera

Superior Facial Recognition



#### Description:

The CCI2143HSB height strip camera provides high quality video at the perpetrator's eye level with 2 megapixel resolution. The CCI2143HSB is available in black (B) or silver (S) chassis to match the door's mullion to blend in with the overall building aesthetics. The height strip camera is an ideal choice for applications such as banking, retail stores and many others.

Costar's IP cameras are compatible with the StarNET Video Management Software (VMS). StarNET is the remote access software that incorporates features such as simplified user management, advanced camera mapping and logical camera grouping making it easier to monitor and access each of your cameras. The StarNET user interface also has the ability to integrate both analog and IP camera technology on the same platform allowing you to have a diverse surveillance system. Costar's IP cameras are ONVIF supported. ONVIF is an industry standard that ensures interoperability between IP-based security products regardless of brand.

#### Features:

- 2 megapixel resolution (1080p)
- 4.3 mm F2.0 fixed lens
- 1/2.8" CMOS Progressive Scan image sensor
- Multiple compression (H.264, MJPEG)
- Motion detection
- Triple IP streaming
- Analog video output
- Wide Dynamic Range (WDR)
- Durable anodized aluminum construction
- Adjustable gimbal mounted camera provides for single, double, or offset doors
- Covertly captures and identify facial images regardless of hats or hoods
- Available in black or silver to match door mullion
- Power over Ethernet (PoE) or 12VDC

# CCI2143HSB Specifications

Model	Description	Resolution
CCI2143HSB	Black	2 Megapixel
CCI2143HSS	Silver	2 Megapixel


<b>Power</b>	
Source	PoE or 12VDC
PoE	802.3af
<b>Sensor</b>	
Image Sensor	1/2.8" CMOS
Scanning Mode	Progressive Scan
Lens	4.3 mm F2.0 Fixed Megapixel
Minimum Illumination	Color: 0.5 Lux @ F2.0
Resolution	2 MP (1920x1080) HD (1280x720) VGA (640x352) CIF (320x176) QCIF (160x96)
Dynamic Range	120dB (True WDR)
Frame Rate	Up to 30 fps
<b>Video Features</b>	
Compression	H.264, MJPEG
Streaming	Triple Stream
Standards	ONVIF
Video Output	RJ45 IP, BNC 1Vp-p analog
<b>System</b>	
Auto Recovery	Yes
Reset Settings	Soft or Factory Reset
Security	Password Protection Alarm I/O, Audio, PTZ
Firmware Upgrade	HTTP, Telnet or FTP
Supported Protocols	HTTP, RTP/RTSP, ICP/IP, FTP, Telnet, RARP, PPPoE, PAP, CHAP, DHCP, SMTP, client (email), NTP
<b>System</b>	
Maximum Connections	16 (Live)
DVRNS	Yes
Remote Access	StarNET Interactive
<b>General Information</b>	
Temperature	14°F to 122°F (-10°C to 50°C)
Humidity	90% RH Max
Approvals	FCC (Class B), CE (Class B), RoHS
Dimensions (W x H)	2.2" x 34.5" x 2.1" (55mm x 872mm x 53.3mm)

## Applications



**StarNET**  
Connect and manage  
IP and Analog cameras on  
a single user interface.

## Dimensions

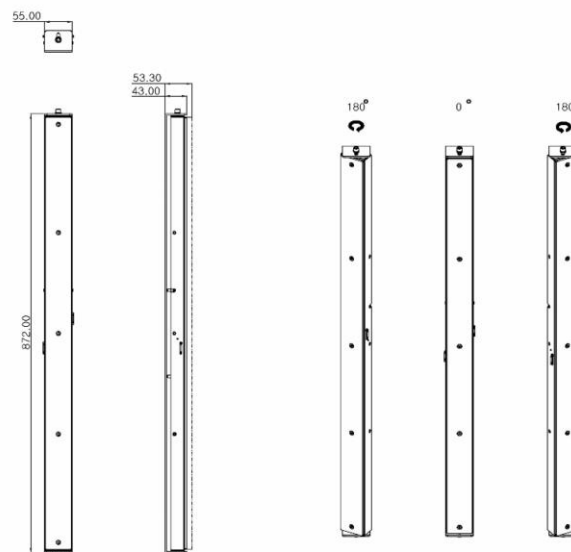

**COSTAR**  
VIDEO SYSTEMS

101 Wrangler, Suite 201 • Coppell, Texas 75019 • Phone: 469-635-6800 • Fax: 469-635-6822 • Toll Free: 1-888-694-STAR (7827)

[www.costarvideo.com](http://www.costarvideo.com)

Specifications and design are subject to change without notice. Conversions: 1" = 25.4mm Measurement conversions are approximate.