

Model: CBI8D33IW

Architectural and
Engineering Specifications

Version 1.4

PART 1: PLEASE REFER TO ATTACHED DOCUMENTS - OVERVIEW & FORMAT SAMPLES

PART 2: PRODUCTS

Division 28 – Electric Safety and Security

Section 28 23 29 – Video Surveillance Remote Devices and Sensors

2.1.0 Manufacturer

1. Costar Video Systems
101 Wrangler Drive, Suite 201
Coppell, Texas 75019
Tel: 469-635-6800
Fax: 469-635-6822

2.2.0 General

2.2.1 Product Description

CBI8D33IW is a Bullet type IP Camera designed and manufactured by Costar Video Systems. This camera provides 8M (3840 x 2160) resolution at 30ips (images per second) with H.265/H.264/M-JPEG compression. This camera is equipped with fixed-focal lens, True Day/Night, PoE (IEEE 802.3af Class 3), IR LED, Alarm I/O, microSD/SDHC/SDXC Smart Failover (up to 512GB), Vandal-proof bullet enclosure design and IP67 rated.

2.2.2 General Specification

1. The IP camera shall be equipped with 8 Megapixel 1/2.8" CMOS Sensor.
2. The IP camera shall be equipped with 3.3mm Fixed-focal lens, F2.0.
3. The IP camera shall be a true day/night camera with a mechanical filter for low light performance. The filter can be switched remotely, or automatically via a light level sensor or contact input (ICR).
4. The IP camera shall have Wide Dynamic Range compensation (Digital WDR) for improved video quality in high-contrast situations (120dB).
5. The IP camera shall be equipped with 4ea Infrared LED with range up to 20m (65.6 ft.).
6. The IP camera shall utilize configurable 2DNR/3DNR (Dynamic Noise Reduction) technology to reduce the bitrate and storage requirements by removing noise artifacts.
7. The IP camera shall be Vandal-Proof casing IK10 and IP rating 67.
8. IP camera shall be equipped with 10/100 Base-T, auto-sensing, half/full duplex, RJ45 Ethernet connection.
9. The IP camera shall support industry standard Power over Ethernet (PoE) IEEE 802.3af, Class 3 to supply power to the camera over the network.
10. Using Costar NLTsrec (Non-Linear Time Shifting recording) technology, the IP camera can store




the recording data to the internal recording memory buffer (60MB) in camera if there is a delay in data transmission due to the instantaneous load of the recorder or network, and then transmits the stored data to Costar Video recorder safely.

11. The IP camera shall deliver maximum video resolution of 3840 x 2160 at rates up to 30ips (Images per second).
12. The IP camera shall provide direct network connection using H.265, H.264 and M-JPEG compression.
13. The IP camera shall support Quadruple Streams.
14. The IP camera shall conform to the ONVIF Profile S Ver. 2.4.0 standard.
15. The IP camera shall be equipped with embedded web server which works independently using a Web Browser with ActiveX plug-in.
16. The IP camera shall have SSL Encryption, Multi-user Authority, IEEE 802.1x IP Filtering and HTTPS for greater security.
17. The IP camera shall have network bandwidth limitation and MAT features for more efficient use of network bandwidth.
18. The IP camera shall have Easy network access via UPnP (Universal Plug and Play) function and embedded mDNS (Multicast DNS) protocol.
19. The IP camera shall have Intelligent Video Analysis (VA): Video Motion Detection, Active Tampering Alarm and Trip Zone.

2.2.3 Protocol Specification: DirectNET

1. The IP camera shall have DirectNET mode.
2. DirectNET protocol shall provide easy connection to DirectNET NVR for automatic discovery and video streaming configuration.
3. DirectNET shall provide the compatibility with StarNET Pro VMS or ONVIF for third-party software solutions.
4. DirectNET shall support camera can be linked to Costar software solution such as StarNET and StarNET Pro, or 3rd party solution while it is being connected to a DirectNET NVR.
5. DirectNET camera shall be compatible with DirectNET NVR.
6. DirectNET camera shall be unavailable for No-password login when connecting to DirectNET NVR and StarNET Pro.
7. DirectNET protocol shall provide Quadruple streams.
8. DirectNET protocol shall support H.264 and H.265 and MJPEG compression.

2.3.0 Technical Specification

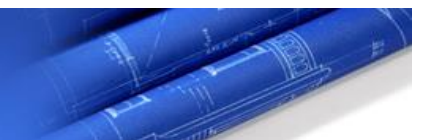

2.3.1 Video Specification


1. Image Sensor: 1/2.8" CMOS
2. Maximum Resolution: 3840 x 2160
3. Scanning Mode: Progressive Scan
4. Lens Type: Fixed-focal (f= 3.3mm, F2.0)
5. IRIS Control: Fixed Iris
6. Angular Field of View (H: Horizontal, V: Vertical, D: Diagonal): 101.3° (H) 54.5°(V) 119.7°(D)
7. Minimum Illumination:
 - A. COLOR: 0.2 lux @ F2.0
 - B. B/W: 0 lux (IR LED ON)
8. S/N Ratio: More than 45dB
9. Maximum Frame Rate:
 - A. 30ips: 3840 x 2160
 - B. 15ips: 3840 x 2160(WDR)
10. Video Resolution: 3840 x 2160, 1920 x 1080, 1280 x 720, 640 x 360
11. Video Compression: H.265, H.264, M-JPEG
12. Intelligent Codec is supported.
13. Video Compression Level: Basic, Standard, High, Very High
14. Multi-Video Streaming: Quadruple streams
15. Dynamic Range: 120dB
16. True Day & Night: Yes (ICR)
17. IR Distance (The number of LEDs): 20m (65.6 ft.) (4ea)
18. Intelligent Video Analytic: Video Motion Detection, Active Tampering Alarm, Trip Zone

2.3.2 Network Specification

1. Port: RJ-45 10/100 Base-T 1 port
2. Network Protocols: Network Protocols: DirectNET Protocol, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNTP, SMTP, FEN, mDNS, Upnp
3. Streaming Mode: Quadruple streaming

2.3.3 Security Specification

1. SSL Encryption, Multi-User Authority, IEEE 802.1x, IP Filtering, HTTPS
2. Maximum User Access: 10 (Live), 1 (Recording), 1 (Search), 2 (Admin)

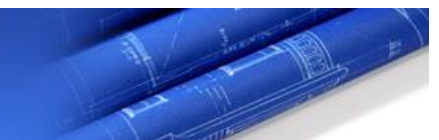

2.3.4 Alarm and Event Specification

1. Alarm Input / Output 1/1
 - A. Alarm Input: 1 TTL, NC/NO Programmable, 4.3V(NC) or 0.3V(NO) threshold, 5V DC,
 - B. Mechanical or electrical switches can be wired to the Alarm-In and GND connectors. The maximum voltage should not exceed 5V.
 - C. Alarm Output: 1 TTL open collector, 30mA @ 5 VDC
2. Trigger Events: Motion Detection, Alarm in, Tampering, Trip Zone
3. Event Notification: Remote Software, Email (with Image)

2.4.0 Environmental Specification

1. Operating Temperature: -20°C ~ +55°C (-22°F ~ +131°F)
*Starting up at above 0°C (32°F)
2. Operating Humidity: 0% to 90% non-condensing
3. Vandal-proof Enclosure: IK10
4. Outdoor Ready: IP67

2.5.0 Electrical Specification

1. Power Source: PoE (IEEE 802.3af class 3)
2. Power Consumption: PoE, (IEEE 802.3af Class 3), 9.0W
3. Regulatory Approvals: FCC, CE, KC

2.6.0 Mechanical Specification

1. Dimensions (W x H): 75mm x 70mm x 195.8mm (2.95" x 2.75" x 7.7")
2. Unit Weight: 0.655 kg

Version History

Version	Writer	Revision Date	Remarks
1.0	TS Team	Mar. 23, 2021	Initial Release

