

**2 Mega Pixel Stainless Steel
3.6mm Fixed Lens Bullet Camera****Description:**

The CBT2H36IX Stainless Steel camera provides high quality video at 2 megapixel resolution over existing coaxial cable. The SUS316L Electro-polished stainless steel-power coated (white) housing is IP67 rated to withstand the harshest Environments.

Costar's Stainless-Steel cameras are Costar's new line of HDTV cameras are compatible with the ET Series DVRs and StarNET Video Management Software. StarNET is the remote access software that allows users to remotely view live and recorded video. StarNET incorporates features such as advanced event notification, map monitoring, system status monitoring and many more..

Features:


- Max. resolution 2 MP (1920 x 1080)
- 3.6mm Fixed Lens
- 1/2.8" Sony Exmor CMOS image sensor
- True day / night with IR cut filter
- Digital WDR
- Back Light Compensation (BLC)
- Digital Noise Reduction (3DNR)
- HD-TVI, AHD
- IP67 weatherproof rated
- 12VDC

CBT2H36IX Specifications

Model	Lens	Resolution
CBT2H36IX	3.6 Fixed Lens	2 Megapixel (1920 x 1080)

Power	
Source	12 VDC
PoE	---
Consumption	4.5W @12VDC
Sensor	
Image Sensor	1/2.8" Sony Exmor Sensor
Scanning Mode	Progressive Scan
Resolution	1920x1080
Lens Type	Fixed
Lens Focal Length	3.6mm
Aperture	F2.0
Iris Control	Auto
Shutter Speed	30fps : Auto (1/30,000~x8sec) Manual 60fps : Auto (1/50,000~x8sec) Manual
Minimum Illumination	1 Lux @ F2.0 (Color) 0 Lux @ F2.0 (BW)
S/N Ratio	More than 45dB
Dynamic Range	Digital WDR
Electronic Shutter	Auto 1/10,000~1sec, Manual Anti-Flicker 60Hz
Viewing Angle	55.5~3°(H)
CVBS Video Output	BNC
Camera Functions	
Alarm In/Out	---
Audio In/Out	---
Auto Exposure	Yes
Auto White Balance	Yes
Back Light Compensation	Yes
Day / Night	IR Cut Filter with Auto Switch
Digital Noise Reduction	3DNR
Event Buffering	---
Event Notification	---
Event Trigger	---
Motion Detection	---
Privacy Masking	---

Video	
Video Resolution	HD-TVI:1080p @30fps 720p @60fps AHD: 1080p @30fps
Video Output	HD-TVI, AHD, CVBS
General Information	
Vandal Proof Rating	IP67
Approvals	FCC, CE, KC
Humidity	0% ~ 90%
Temperature	-40°F ~ +122°F (-40°C ~ +50°C)
Dimensions (Ø x H x D)	3.00"Ø x 5.24"H x 5.91"D
Weight	3.62lbs
Dimensions	

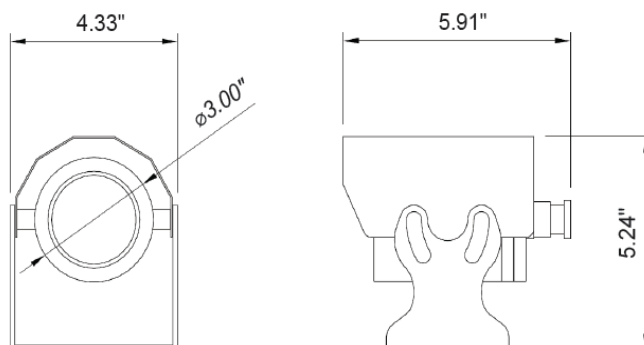

COSTAR
VIDEO SYSTEMS